


FM Constant Impedance Combiner

2 kW, 2 Pole, Compact


BAND II

10 year GUARANTEE

SPECIFICATIONS	60 mm Series	Option
FREQUENCY	87 - 108 MHz	
STANDARD ORDER	2 Poles	with temperature compensation
APPLICATION	FM combining & Spurious suppress	
IMPEDANCE	50 Ohm	
NB RETURN LOSS (VSWR)	>30 dB (1.07)	
WB RETURN LOSS (VSWR)	>30 dB (1.07)	
MAX OUTPUT POWER RATING**	15 kW rms (1 5/8" output)	
NB INPUT CONNECTOR	1 5/8" unflange	N female/ male, 7/16 female/ male 7/8" unflange/ flange, 1 5/8" flange
WB INPUT CONNECTOR	1 5/8" unflange	N female/ male, 7/16 female/ male 7/8" unflange/ flange, 1 5/8" flange
OUTPUT CONNECTOR	1 5/8" unflange	N female/ male, 7/16 female/ male 7/8" unflange/ flange, 1 5/8" flange
TEMPERATURE STABILITY	≤ 3 kHz / °C (without temp. comp.)	≤ 0.5 kHz / °C (with temp. comp.)
MAX PRODUCT TEMPERATURE	70 °C	
ENVIROMENTAL CONDITION	0 to 70 °C IP40	

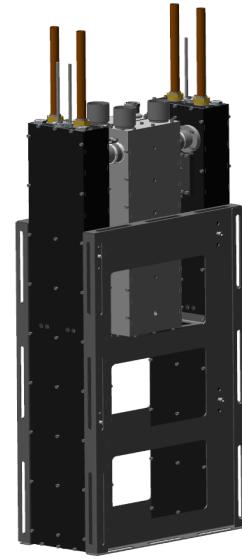


DIMENSIONS AND WEIGHT	
DIMENSIONS	395 x 198 x 1124 mm
L x W x H	(15.6 x 7.8 x 44.3 in)
WEIGHT	30 kg (66 lb)
STANDARD FRAME	Stand alone
COLOUR	Black and aluminium

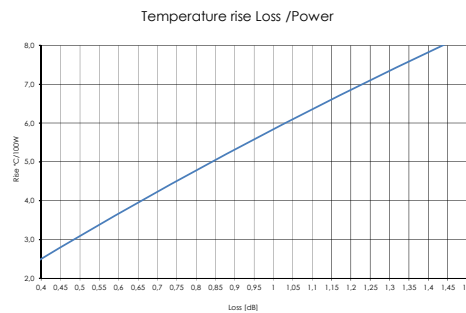

TYPICAL DATA*	STANDARD TUNED	SHARP TUNED
ARTICLE NO	CI22x06xxxA-EExxx	CI22x06xxxA-EExxx
NB INSERTION LOSS		
Centre frequency	<0.45 dB	<1.25 dB
Effective passband @ ± 200 KHz	<0.45 dB	<1.25 dB
± 150 KHz	<0.45 dB	<1.55 dB
± 200 KHz	<0.45 dB	<2.05 dB
± 0.6 MHz	>0.7 dB	>11.0 dB
± 1.0 MHz	>3.0 dB	>19.0 dB
± 2.0 MHz	>11.5 dB	>30.0 dB
± 2.5 MHz	>14.0 dB	>33.0 dB
NB GOUPDELAY VARIATION		
(typical)		
± 150 KHz	<10 ns (5 ns)	<90 ns (85 ns)
± 200 KHz	<15 ns (10 ns)	<105 ns (100 ns)
WB INSERTION LOSS		
± 0.8 MHz	-	<0.46 dB
± 1.0 MHz	-	<0.25 dB
± 1.5 MHz	<0.95 dB	<0.11 dB
± 2.0 MHz	<0.40 dB	<0.08 dB
± 3.0 MHz	<0.13 dB	<0.06 dB
ISOLATION		
NARROWBAND - WIDEBAND	>36 dB	>36 dB
WIDEBAND - NARROWBAND @		
± 1.0 MHz	>39 dB	>55 dB
± 1.5 MHz	>43 dB	>61 dB
± 3.0 MHz	>52 dB	>71 dB
NB MAX INPUT POWER RATING**	2.0 KW RMS	700 W RMS

Article structure:
ARTICLE: **C22C06P0AA-EE111**

- C** = Combiner Type
- 2** = Frequency band
- 2** = Number of poles
- C** = With/ without temp.comp.
C = without temp. comp.
K = with temp. comp.
- 06** = Cavity size
- P** = Grade
P = black painted
C = black painted with cooling flanges
- 0** = Number of cross coupling
0 = without
- A** = Frame
A = Standard frame, 0 = Without frame
- A** = Version
-
- E** = Narrowband coupler
E = 60mm U-shape
- E** = Wideband coupler
E = 60mm U-shape
- 1** = Narrowband connection
- 1** = Wideband connection
- 1** = Output connection
C = N female, D = N male
A = 7/16 female, B = 7/16 male
7 = 7/8" unflange, J = 7/8" flange
1 = 1 5/8" unflange, E = 1 5/8" flange

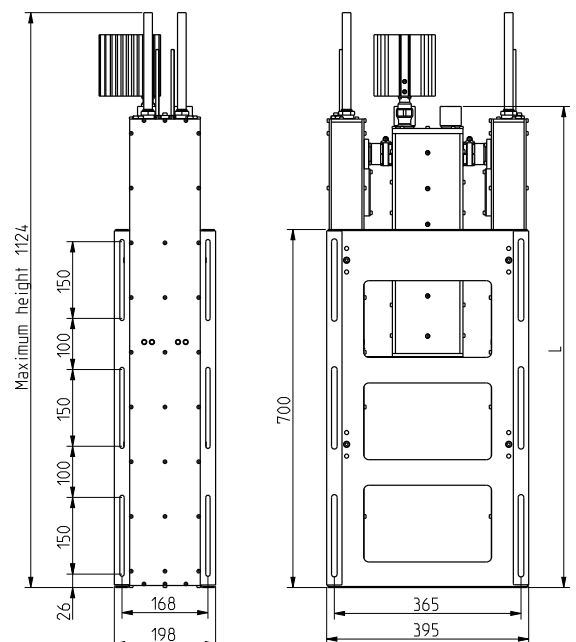

* Data in table is typical data. at 100 MHz. The combiner can be tuned for other specifications or bandwidth. Please contact us for a designed specification.

** All average power values and technical data refer to an ambient temperature of +20 °C with normal airflow. The product can have a maximum surface temperature of +70 °C. Maximum power capacity may be lower depending on channel allocation. Data are subjected to change without prior notice.