


# FM Constant Impedance Combiner

1.4 kW, 3 Pole, Compact

BAND II


10 year GUARANTEE

SPECIFICATIONS	60 mm Series	Option
FREQUENCY	87 - 108 MHz	
STANDARD ORDER	3 Poles	with temperature compensation
APPLICATION	FM combining & Spurious suppres	
IMPEDANCE	50 Ohm	
NB RETURN LOSS (VSWR)	>30 dB (1.07)	
WB RETURN LOSS (VSWR)	>30 dB (1.07)	
MAX OUTPUT POWER RATING**	15 kW rms (1 5/8" output)	
NB INPUT CONNECTOR	1 5/8" unflange	N female/ male, 7/16 female/ male 7/8" unflange/ flange, 1 5/8" flange
WB INPUT CONNECTOR	1 5/8" unflange	N female/ male, 7/16 female/ male 7/8" unflange/ flange, 1 5/8" flange
OUTPUT CONNECTOR	1 5/8" unflange	N female/ male, 7/16 female/ male 7/8" unflange/ flange, 1 5/8" flange
TEMPERATURE STABILITY	≤ 3 kHz / °C (without temp. comp.)	≤ 0.5 kHz / °C (with temp. comp.)
MAX PRODUCT TEMPERATURE	70 °C	
ENVIROMENTAL CONDITION	0 to 70 °C IP40	

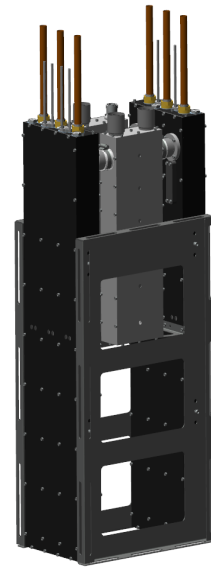

## DIMENSIONS AND WEIGHT


DIMENSIONS	395 x 264 x 1124 mm
L x W x H	(15.6 x 10.4 x 44.3 in)
WEIGHT	37 kg (81.6 lb)
STANDARD FRAME	Stand alone
COLOUR	Black and aluminium

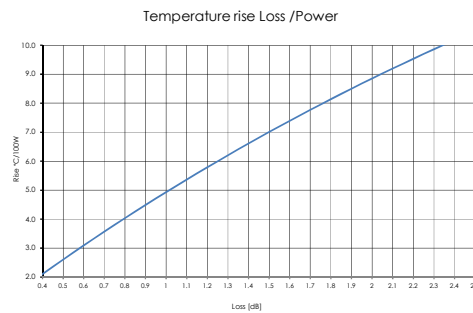

TYPICAL DATA*	STANDARD TUNED	SHARP TUNED
ARTICLE NO	CI23x06xxxA-EExxx	CI23x06xxxA-EExxx
<b>NB INSERTION LOSS</b>		
Centre frequency	<0.75 dB	<2.10 dB
Effective passband @ ± 200 KHz	<0.75 dB	<2.10 dB
± 150 KHz	<0.75 dB	<2.50 dB
± 200 KHz	<0.75 dB	<3.10 dB
± 0.6 MHz	>1.0 dB	>20.0 dB
± 1.0 MHz	>6.0 dB	>33.0 dB
± 2.0 MHz	>22.0 dB	>50.0 dB
± 2.5 MHz	>28.0 dB	>57.0 dB
<b>NB GOUPDELAY VARIATION</b>		
(typical)		
± 150 KHz	<10 ns (5 ns)	<190 ns (185 ns)
± 200 KHz	<15 ns (10 ns)	<310 ns (305 ns)
<b>WB INSERTION LOSS</b>		
± 0.6 MHz	-	<0.55 dB
± 0.8 MHz	-	<0.30 dB
± 1.0 MHz	-	<0.20 dB
± 1.5 MHz	<0.45 dB	<0.15 dB
± 2.0 MHz	<0.25 dB	<0.10 dB
± 3.0 MHz	<0.10 dB	<0.10 dB
<b>ISOLATION</b>		
NARROWBAND - WIDEBAND	>36 dB	>36 dB
WIDEBAND - NARROWBAND @		
± 1.0 MHz	>42 dB	>69 dB
± 1.5 MHz	>51 dB	>79 dB
± 3.0 MHz	>68 dB	>96 dB
NB MAX INPUT POWER RATING**	1.4 KW RMS	540 W RMS

## Article structure: ARTICLE: C23C06P0AA-EE111

- C** = Combiner Type
- 2** = Frequency band
- 3** = Number of poles
- C** = With/ without temp.comp.  
C = without temp. comp.  
K = with temp. comp.
- 06** = Cavity size
- P** = Grade  
P = black painted  
C = black painted with cooling flanges
- 0** = Number of cross coupling  
0 = without
- A** = Frame  
A = Standard frame, 0 = Without frame
- A** = Version
- 
- E** = Narrowband coupler  
E = 60mm U-shape
- E** = Wideband coupler  
E = 60mm U-shape
- 1** = Narrowband connection
- 1** = Wideband connection
- 1** = Output connection  
C = N female, D = N male  
A = 7/16 female, B = 7/16 male  
7 = 7/8" unflange, J = 7/8" flange  
1 = 1 5/8" unflange, E = 1 5/8" flange

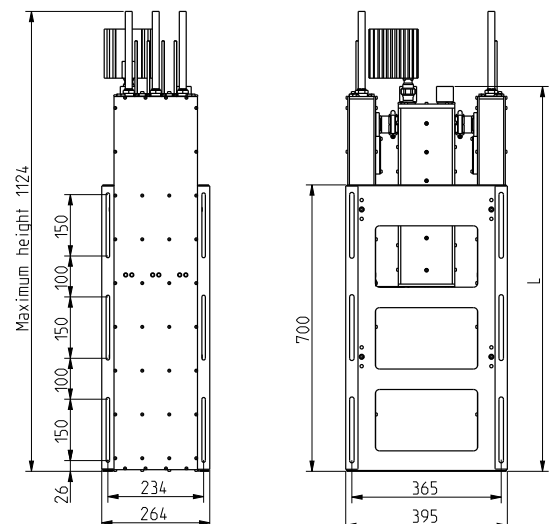

\* Data in table is typical data. at 100 MHz. The combiner can be tuned for other specifications or bandwidth. Please contact us for a designed specification.

\*\* All average power values and technical data refer to an ambient temperature of +20 °C with normal airflow. The product can have a maximum surface temperature of +70 °C. Maximum power capacity may be lower depending on channel allocation. Data are subjected to change without prior notice.